



SERIE

**Timbratrice
Stamping machine**

9552



9500



ARES (Italia) S.r.l.
Corso Novara, 115 - 27029 Vigevano (PV)
Tel. +39 0381 326642 (r.a.) - Fax +39 0381 325453
info@aresitalia.info - sales@aresitalia.info - service@aresitalia.info
Web: <http://www.aresitalia.info>



Timbratrice pneumatica
Pneumatic hot stamping machine

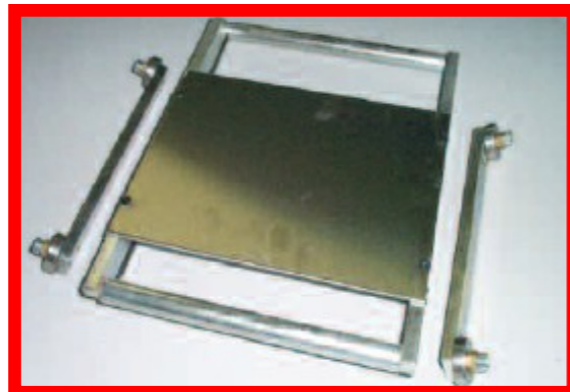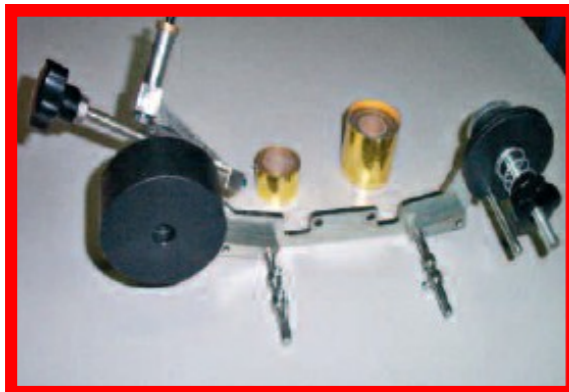

Questa macchina, compatta, veloce e molto semplice da usare è stata creata per le medie -alte produzioni, le piccole dimensioni permettono ugualmente una grande lavorabilità e spazio per pezzi di media grandezza. Può timbrare a caldo e a freddo, con e senza nastro decorativo. La notevole potenza elettrica erogata permette di applicare clichè di 120 x 80 mm. La spinta di marcatura generata dal notevole pistone pneumatico garantisce una forza di 450 kg /cmq a una pressione di 6-8 atmosfere. La discesa e il risalita del pistone sono assistite da freni meccanici a molla per addolcire gli spostamenti. Disponibile con gruppo oro piano scorrevole e sostegno basso o con sostegno alto azionamento a pedale e con doppio bottone.

CARATTERISTICHE:

- Alimentazione 220 Volt.
- Potenza 350 W.
- All'uscita n ° 2 resistenze da 100W.
- Dimensioni Porta clichè: 120 x 80 mm.
- Regolazione temperatura da 20 a 250 °C.
- Temporizzatore ciclo di lavoro: da 0 a 10 secondi.
- Piano di lavoro: 150 x 200 mm.
- Azionamento a pedaliera o con doppio bottone.

This machine compact fast and much simple one to use are created for the medium-high productions the small dimensions equally allow to a great workableness and space for pieces of medium largeness. It can stamp to warmth and cold, with and without decorative tape. The remarkable power distributed electrical worker allows to apply clichè of 120 x 80 millimetre. The push of marking generated from the remarkable pneumatic piston guarantees a force of 450 kg/cm² to one 6-8 pressure atmospheres. The reduction and the gone back one of the piston are assisted from mechanical motivating force brakes in order to sweeten the movements.

SPECIFICATIONS:

- Alimentation: 220 VOLT.
- Power: 350 W.
- Exit n ° 2 resistors of 100 W.
- Clichè size: 120 X 80 mm (extensible).
- Thermocouple Temp: adjustable from 20° to 250° C.
- Timer Cycle: 0,01 Sec -10/100 Sec.
- Working plane: 200 X 150 mm (Extensible).
- Start by Pedal or Double Button



Dati tecnici - Technical data (9552)

Assorbimento	Power	0,35 kW
Peso	Weight	35 Kg
Dimensioni L x P x H	Sizes L x D x H	210 x 410 x 550 mm